

Rob Baquera Valerie Gross Alisa Fong

Julie Constant Meghan Krafka

Derk Garcia, Superintendent

E-Rate FY2022

CATEGORY 2 INTERNAL CONNECTIONS CABLING INFRASTRUCTURE & COMMUNICATION CLOSET UPLIFT

RFP # 22-919

Deadline for Submittal: December 23, 2021 NO LATER THAN 12:00 P.M.

Site Walk & Questions Posted November 23, 2021

Companies Represented During Site Walk

- Extenda Wireless
- AMS.NET
- CH Reynolds
- KS Telecom

BID Response Format:

All bids should be submitted on vendor quotes. Quotes should broken down by site and should have non-Erate eligible items separated out or listed as an option on that sites quote


Bid Contingencies:

Each quote shall include a 10% contingency for any unforeseen expectations or changes needed be made in the field

WAP Installations:

 All WAP installations shall follow District Standard shown below, unless otherwise agreed upon or directed otherwise via the documentation.

RCSD Wireless AP Ceiling Tile Installation Preference

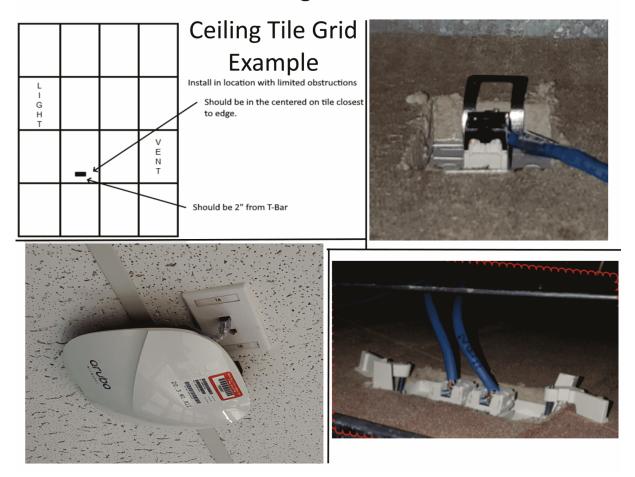


Buljan Middle School

- On the section for IDF 1.5:
 - Remove "Install power into cabinet" where referenced. The District will take on all power responsibilities.
 - o Revise 'Install New Cabinet' to say, Install relocated cabinet from Junction
 - o Extend as needed 6 strands from White LIU into new cabinet LIU
- On the section for IDF 1.3:
 - No changes to note

Chilton Middle School

- No site visit was performed based on group decision, but offered pictures of the IDF location
- IDF Cabinet Location

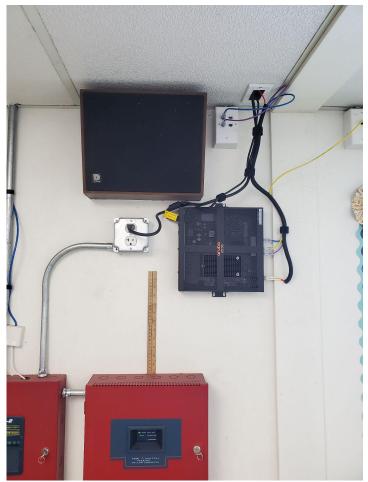

С



0

- o Place the Cabinet above fireboxes. Slimline or Low Profile cabinet will work for this location as the items in the cabinet will be:
 - Relocate Existing Fiber LIU
 - Max of 2 Switches (1U Each)
 - Patch Panel
- o District will remove power as seen and re-install after

Junction Elementary School

- IDF 1.5
 - o Install Ethernet Jacks and biscuit in RM30 (Far side of run)
 - Use existing patch panel
- Network Cabinet Removal
 - o District will remove power

Spanger Elementary School IDF - Library

- - Use Existing Patch Panel